


OUTDOOR LIGHTING

# ACE DOWN 100 - 230V



## GENERAL

ACE DOWN 100-230V

Category \_\_\_\_\_ wall  
Light source \_\_\_\_\_ LED  
Color changing \_\_\_\_\_ no  
Warranty \_\_\_\_\_ 5 years

## DIMENSIONS

Length \_\_\_\_\_ 103 mm / 4.06"  
Width \_\_\_\_\_ 100 mm / 3.94"  
Height \_\_\_\_\_ 100 mm / 3.94"  
Diameter \_\_\_\_\_ -  
Total height \_\_\_\_\_ -  
Recess depth \_\_\_\_\_ -

## ELECTRONICS

Voltage \_\_\_\_\_ 100-230V AC  
Output \_\_\_\_\_ 8.50 Watt  
VA \_\_\_\_\_ 20.00  
Power factor \_\_\_\_\_ 0.43  
Light source \_\_\_\_\_ 2x LED High Power 3.5W  
Lifetime \_\_\_\_\_ 25000 hours  
Dimmable \_\_\_\_\_ no  
Length of cable lead \_\_\_\_\_ 600 mm / 24"

## LIGHT SPECIFICATIONS

Color temperature \_\_\_\_\_ 3000 K  
CRI (RA) \_\_\_\_\_ 92  
Luminous intensity \_\_\_\_\_ 216 Cd  
Light beam 0-180 \_\_\_\_\_ 62°  
Light beam 90-270 \_\_\_\_\_ 62°  
Net luminous flux \_\_\_\_\_ 346 lumen  
Luminous efficiency \_\_\_\_\_ 41 lumenwatt

## MATERIAL

Ring Plate \_\_\_\_\_ -  
Lens \_\_\_\_\_ polycarbonate  
Exterior \_\_\_\_\_ aluminum  
Easy Lock included \_\_\_\_\_ yes  
Installation hardware included \_\_\_\_\_ yes

## AVAILABLE PRODUCT COLORS



■ Corten: 10302060    ■ Dark Grey: 10302050  
■ Rose Silver: 10302000    □ White: 10302055

## AVAILABLE ACCESSORIES


LENS CLEAR, LENS DIFFUSE, SHUTTER 2


## PROTECTION RATING

IP : 55

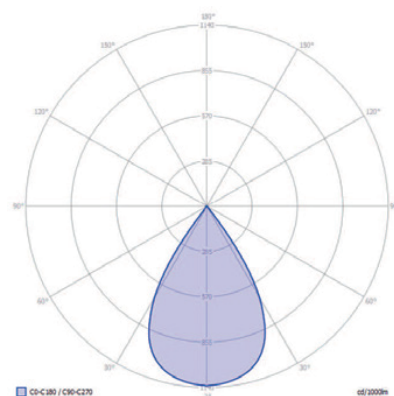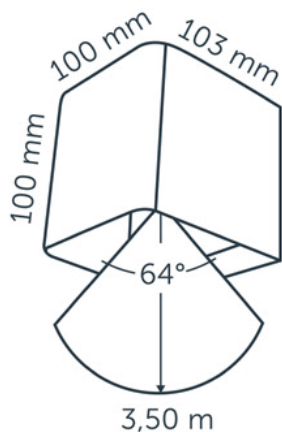

in-lite®

| ILLUMINANCE - CONE OF LIGHT                                                                                                                                            |                    |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------|
| CENTER BEAM (FC)                                                                                                                                                       | BEAM DIAMETER (FT) | DISTANCE (FT) |
| 18                                                                                                                                                                     | 4.21               | 3.5           |
| 5                                                                                                                                                                      | 7.81               | 6.5           |
| 2                                                                                                                                                                      | 11.42              | 9.5           |
| 1                                                                                                                                                                      | 15.02              | 12.5          |
| 1                                                                                                                                                                      | 18.63              | 15.5          |
| 1                                                                                                                                                                      | 22.23              | 18.5          |
|  <p>Beam angle (0-180°) (90-270°): 62°<br/>edge illuminance is 1/2 of Centre beam</p> |                    |               |

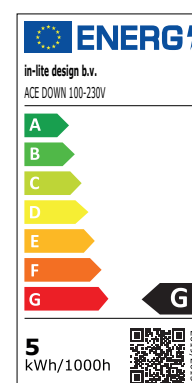

in-lite®