

OUTDOOR LIGHTING

BLINK



GENERAL

BLINK
Category _____ wall
Light source _____ LED
Color changing _____ no
Warranty _____ 5 years

DIMENSIONS

Length _____ -
Width _____ 48 mm / 1.89"
Height _____ -
Diameter _____ 100 mm / 3.94"
Total height _____ -
Recess depth _____ -

ELECTRONICS

Voltage _____ 12V AC
Output _____ 1.00 Watt
VA _____ 1.70
Power factor _____ 0.59
Light source _____ 3x SMD-LED 0.5W
Lifetime _____ 25000 hours
Dimmable _____ no
Length of cable lead _____ 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature _____ 2800 K
CRI (RA) _____ 95
Luminous intensity _____ 24.30 Cd
Light beam 0-180 _____ 77°
Light beam 90-270 _____ 115°
Net luminous flux _____ 52 lumen
Luminous efficiency _____ 52 lumenwatt

MATERIAL

Ring Plate _____ -
Lens _____ polycarbonate
Exterior _____ aluminum
Easy Lock included _____ yes
Installation hardware included _____ yes

AVAILABLE PRODUCT COLORS



■ Rose Silver: 10301200 □ White: 10301265
■ Dark Grey: 10301250

AVAILABLE ACCESSORIES


FIX 1


PROTECTION RATING

IP : 55

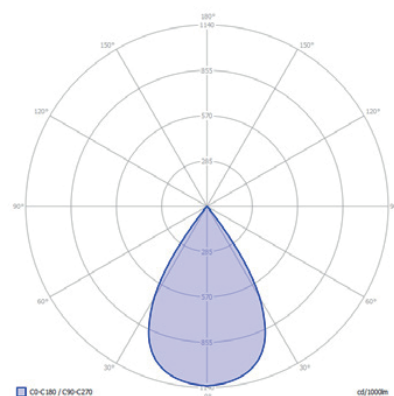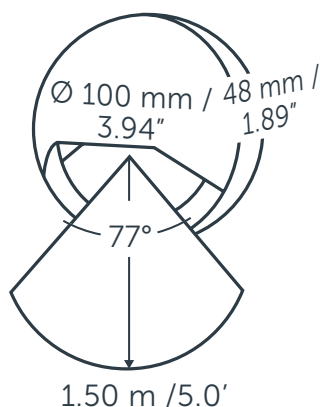

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
9	2.55	1.6
4	3.82	2.4
2	5.09	3.2
2	6.36	4.0
1	7.64	4.8
1	8.91	5.6
 Beam angle (0-180°): 77° edge illuminance is 1/2 of Centre beam		

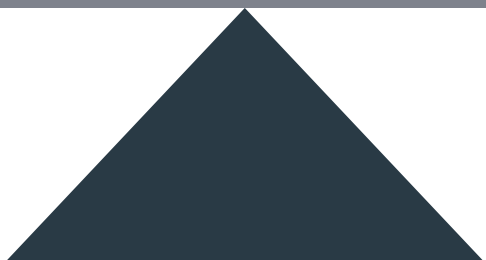ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
9	5.02	1.6
4	7.53	2.4
2	10.05	3.2
2	12.56	4.0
1	15.07	4.8
1	17.58	5.6
 Beam angle (90-270°): 115° edge illuminance is 1/2 of Centre beam		

12 VOLT



in-lite®