

OUTDOOR LIGHTING

EVO LOW



GENERAL

EVO LOW
Article number 10202510
Category solitary
Light source LED
Color changing no
Warranty 5 years

DIMENSIONS

Length 120 mm / 4.72"
Width 50 mm / 1.97"
Height 366 mm / 14.41"
Diameter -
Total height 636 mm / 25.04"
Recess depth -

ELECTRONICS

Voltage 12V AC
Output 2.00 Watt
VA 2.10
Power factor 0.95
Light source 27x SMD-LED 0.6W
Lifetime 25000 hours
Dimmable no
Length of cable lead 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature 2950 K
CRI (RA) 95
Luminous intensity 56.10 Cd
Light beam 0-180 57°
Light beam 90-270 87°
Net luminous flux 79 lumen
Luminous efficiency 40 lumenwatt

MATERIAL

Ring Plate -
Lens acrylic (PMMA)
Exterior aluminum
Easy Lock included yes
Installation hardware included yes

AVAILABLE PRODUCT COLORS



■ Black

AVAILABLE ACCESSORIES

-

PROTECTION RATING

IP : 55

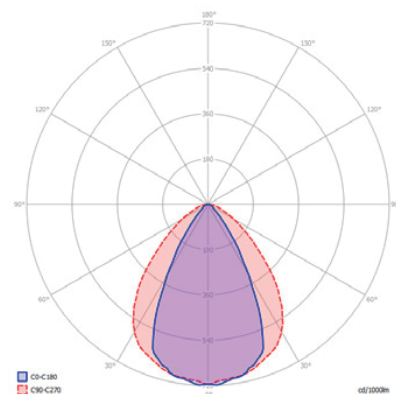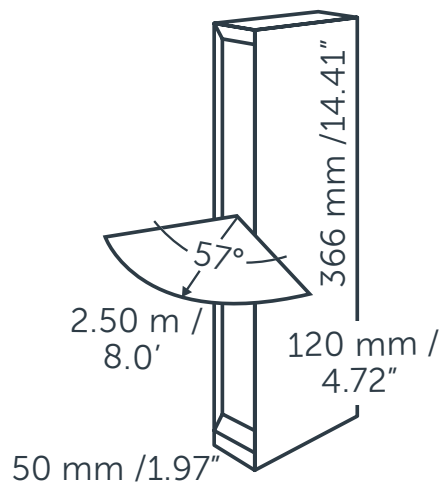

in-lite®


ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
6	3.26	3.0
3	4.89	4.5
2	6.52	6.0
1	9.23	8.5
1	10.86	10.0
0	12.49	11.5

Beam angle (0-180°): 57°
edge illuminance is 1/2 of Centre beam

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
6	5.69	3.0
3	8.54	4.5
2	11.39	6.0
1	16.13	8.5
1	18.98	10.0
0	21.83	11.5

Beam angle (90-270°): 87°
edge illuminance is 1/2 of Centre beam

12 VOLT

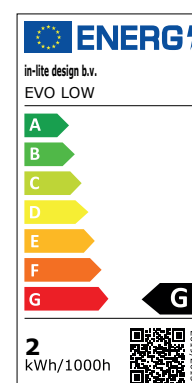

in-lite®