

OUTDOOR LIGHTING

EVO DOWN 100-230V



GENERAL

EVO DOWN 100-230V
Article number 10302505
Category wall
Light source LED
Color changing no
Warranty 5 years

DIMENSIONS

Length 75 mm / 2.95"
Width 50 mm / 1.97"
Height 300 mm / 11.81"
Diameter -
Total height -
Recess depth -

ELECTRONICS

Voltage 100-230 V AC
Output 4.50 Watt
VA 11.50
Power factor 0.39
Light source 1x LED High Power 3.5W
Lifetime 25000 hours
Dimmable no
Length of cable lead 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature 3000 K
CRI (RA) 92
Luminous intensity 97.20 Cd
Light beam 0-180 64°
Light beam 90-270 60°
Net luminous flux 106 lumen
Luminous efficiency 24 lumenwatt

MATERIAL

Ring Plate -
Lens acrylic (PMMA)
Exterior aluminum
Easy Lock included yes
Installation hardware included yes

AVAILABLE PRODUCT COLORS



■ Black

AVAILABLE ACCESSORIES

EVO WALL MOUNT

PROTECTION RATING

IP : 55

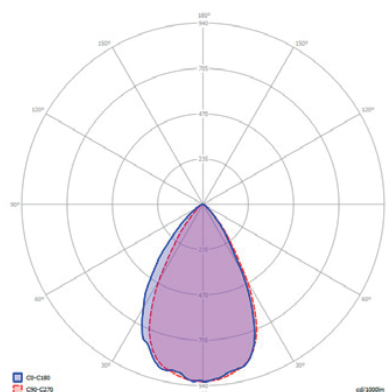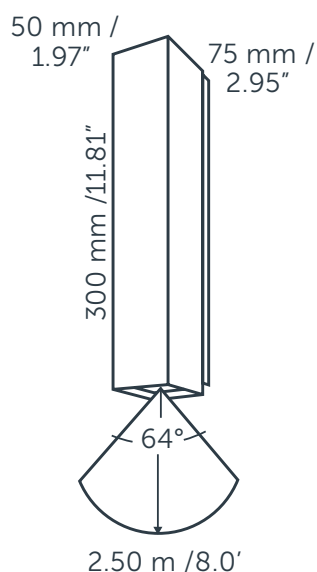


in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
16	3.12	2.5
4	6.25	5.0
2	9.37	7.5
1	12.50	10.0
1	15.62	12.5
0	18.75	15.0

Beam angle (0-180°): 64°
edge illuminance is 1/2 of Centre beam

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
16	2.89	2.5
4	5.77	5.0
2	8.66	7.5
1	11.55	10.0
1	14.43	12.5
0	17.32	15.0

Beam angle (90-270°): 60°
edge illuminance is 1/2 of Centre beam

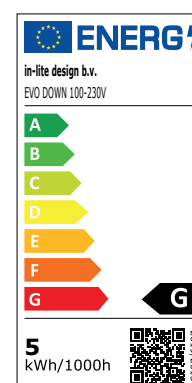

in-lite®