

EVO HYDE 550

GENERAL

EVO HYDE 550
Article number: 10250150
Category: surface
Light source: LED
Color changing: no
Warranty: 5 years

DIMENSIONS

Length: 556 mm / 21.89"
Width: 16 mm / 0.63"
Height: 22 mm / 0.87"
Diameter: -
Total height: -
Recess depth: -

ELECTRONICS

Voltage: 12V AC
Output: 2.00 Watt
VA: 2.10
Power factor: 0.95
Light source: 45x SMD-LED 0.06W
Lifetime: 25000 hours
Dimmable: no
Length of cable lead: 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature: 2950 K
CRI (RA): 96
Luminous intensity: 61.30 Cd
Light beam 0-180: 62°
Light beam 90-270: 92°
Net luminous flux: 91 lumen
Luminous efficiency: 46 lumenwatt

MATERIAL

Ring Plate: -
Lens: acrylic (PMMA)
Exterior: aluminum
Easy Lock included: yes
Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Black



AVAILABLE ACCESSORIES

FIX 5

PROTECTION RATING

IP : 53

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance [lux]
[m]	[ft]	[m]	[ft]	[m]	[ft]	
0.8	2.5	0.9	3.0	1.6	5.1	109.0
1.5	4.9	1.8	5.9	3.1	10.2	27.2
2.3	7.4	2.7	8.9	4.7	15.3	12.1
3.0	9.8	3.6	11.8	6.2	20.4	6.8
3.8	12.3	4.5	14.8	7.8	25.5	4.4
4.5	14.8	5.4	17.7	9.3	30.6	3.0
0.3	1.0	0.4	1.2	0.6	2.1	663.3

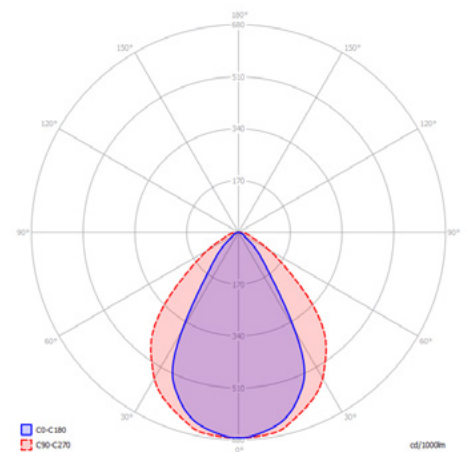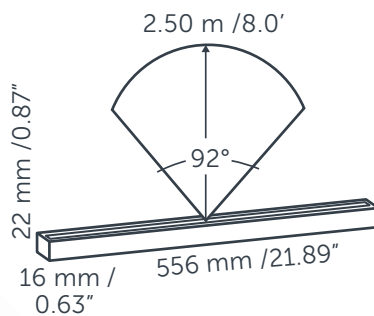

in-lite®

12 volt

