

HALO UP-DOWN 100-230V

GENERAL

HALO UP-DOWN 100-230V
Article number: 10302610
Category: wall
Light source: LED
Color changing: no
Warranty: 5 years

DIMENSIONS

Length: 130 mm / 5.12"
Width: 130 mm / 5.12"
Height: 100 mm / 3.94"
Diameter: 130 mm / 5.12"
Total height: -
Recess depth: -

ELECTRONICS

Voltage: 100-230 V AC
Output: 8.50 Watt
VA: 20.00
Power factor: 0.43
Light source: 2x LED High Power 3.5W
Lifetime: 25000 hours
Dimmable: no
Length of cable lead: 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature: 3000 K
CRI (RA): 93
Luminous intensity: 112.20 Cd
Light beam 0-180: 85°
Light beam 90-270: 85°
Net luminous flux: 367 lumen
Luminous efficiency: 43 lumenwatt

MATERIAL

Ring Plate: -
Lens: polycarbonate
Exterior: aluminum
Easy Lock included: yes
Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Black



AVAILABLE ACCESSORIES

LENS DIFFUSE, SHUTTER 2

PROTECTION RATING

IP : 55

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	
1.0	3.3	1.8	6.0	1.8	6.0	112.2
1.5	4.9	2.8	9.0	2.8	9.0	499
2.0	6.6	3.7	12.0	3.7	12.0	28.1
2.5	8.2	4.6	15.0	4.6	15.0	18.0
3.0	9.8	5.5	18.0	5.5	18.0	12.5
3.5	11.5	6.4	21.0	6.4	21.0	9.2
1.0	3.3	1.8	6.0	1.8	6.0	112.2

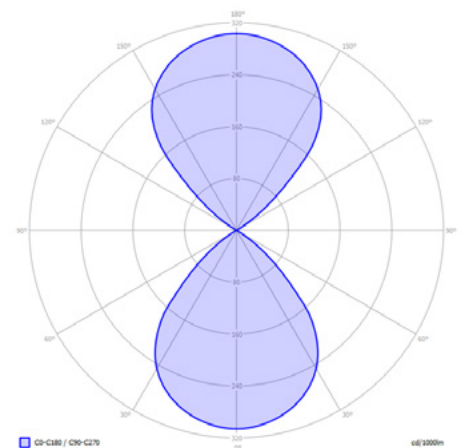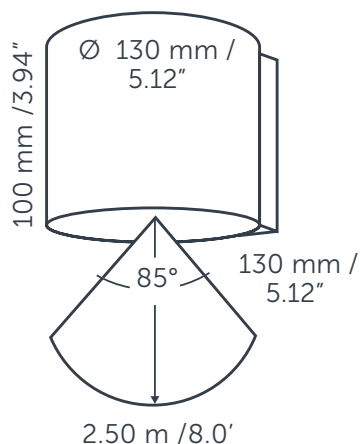

in-lite®

12 volt

