

## OUTDOOR LIGHTING

# LIV LOW



### GENERAL

LIV LOW  
Category solitary  
Light source LED  
Color changing no  
Warranty 5 years

### DIMENSIONS

Length -  
Width -  
Height 372 mm / 14.65"  
Diameter 67 mm / 2.64"  
Total height -  
Recess depth -

### ELECTRONICS

Voltage 12V AC  
Output 1.50 Watt  
VA 2.50  
Power factor 0.60  
Light source 3x SMD-LED 0.5W  
Lifetime 25000 hours  
Dimmable no  
Length of cable lead 600 mm / 24"

### LIGHT SPECIFICATIONS

Color temperature 2750 K  
CRI (RA) 95  
Luminous intensity 6.10 Cd  
Light beam 0-180 179°  
Light beam 90-270 116°  
Net luminous flux 60 lumen  
Luminous efficiency 40 lumenwatt

### MATERIAL

Ring Plate -  
Lens polycarbonate  
Exterior aluminum  
Easy Lock included yes  
Installation hardware included yes

### AVAILABLE PRODUCT COLORS



■ Corten: 10201781    ■ Dark Grey: 10201761  
■ Rose Silver: 10201751    □ White: 10201775

### AVAILABLE ACCESSORIES

-

### PROTECTION RATING


IP : 55

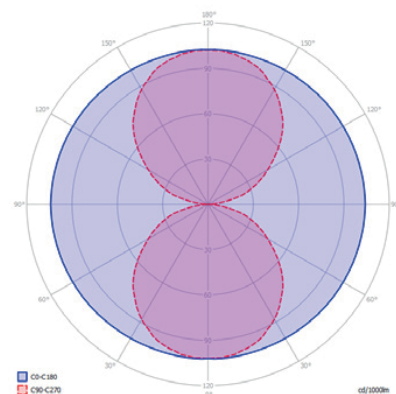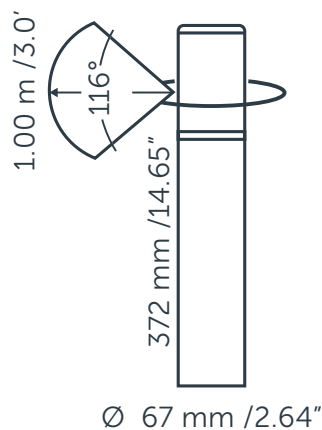

| ILLUMINANCE - CONE OF LIGHT                                         |                    |               |
|---------------------------------------------------------------------|--------------------|---------------|
| CENTER BEAM (FC)                                                    | BEAM DIAMETER (FT) | DISTANCE (FT) |
| 6                                                                   | N/A                | 1.0           |
| 2                                                                   | N/A                | 2.0           |
| 1                                                                   | N/A                | 3.0           |
| 0                                                                   | N/A                | 4.0           |
| 0                                                                   | N/A                | 5.0           |
| 0                                                                   | N/A                | 6.0           |
| Not relevant<br>for ambient lights                                  |                    |               |
| Beam angle (0-180°): 179°<br>edge illuminance is 1/2 of Centre beam |                    |               |

| ILLUMINANCE - CONE OF LIGHT                                          |                    |               |
|----------------------------------------------------------------------|--------------------|---------------|
| CENTER BEAM (FC)                                                     | BEAM DIAMETER (FT) | DISTANCE (FT) |
| 6                                                                    | N/A                | 1.0           |
| 2                                                                    | N/A                | 2.0           |
| 1                                                                    | N/A                | 3.0           |
| 0                                                                    | N/A                | 4.0           |
| 0                                                                    | N/A                | 5.0           |
| 0                                                                    | N/A                | 6.0           |
| Not relevant<br>for ambient lights                                   |                    |               |
| Beam angle (90-270°): 116°<br>edge illuminance is 1/2 of Centre beam |                    |               |

12 VOLT

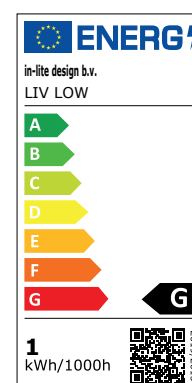

in-lite®