

OUTDOOR LIGHTING

MINI SWAY



GENERAL

MINI SWAY
Category _____ spot
Light source _____ LED
Warranty _____ 5 years

DIMENSIONS

Length _____ -
Width _____ -
Height _____ 350 mm / 13.77"
Diameter _____ 50 mm / 1.96"
Total height _____ -
Recess depth _____ -

ELECTRONICS

Voltage _____ 12V AC
Output _____ 0.50 Watt
VA _____ 0.60
Power factor _____ 0.90
Light source _____ 18 x SMD 0.06 W
Lifetime _____ 25000 hours
Dimmable _____ no
Length of cable lead _____ 600 mm / 24"

LIGHT SPECIFICATIONS

Color temperature _____ 2900 K
CRI (RA) _____ 96
Luminous intensity _____ 10.1 Cd
Light beam 0-180 _____ 108°
Light beam 90-270 _____ 108°
Net luminous flux _____ 33 lumen
Luminous efficiency _____ 68 lumenwatt

MATERIAL

Lens _____ polycarbonate
Exterior _____ aluminium

AVAILABLE PRODUCT COLORS

- Light Head Black: 10202410
- Light Head Pearl Grey: 10202415



AVAILABLE ACCESSORIES

MINI SWAY CAP

PROTECTION RATING

IP : 55

Ø 3.35" / 85 mm

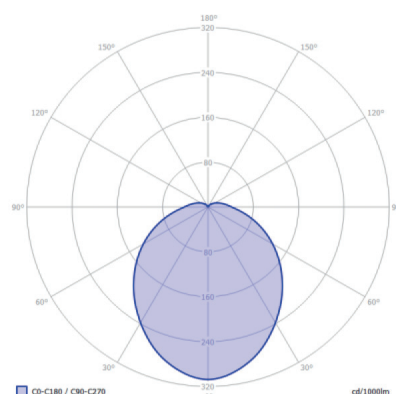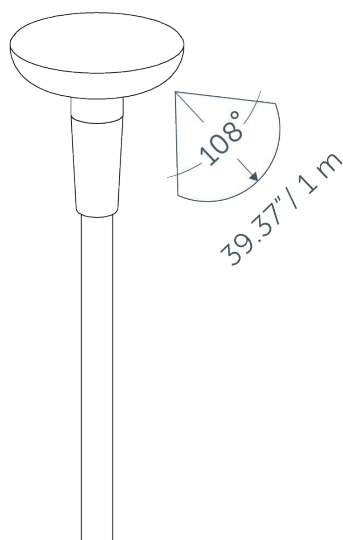

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
112	0.83	0.3
28	1.65	0.6
12	2.48	0.9
7	3.30	1.2
4	4.13	1.5
3	4.95	1.8
Beam angle (0-180°) (90-270°): 108° edge illuminance is 1/2 of Centre beam		

12 VOLT



in-lite
 MINI SWAY

A
 B
 C
 D
 E
 F
 G

0
 kWh/1000h

Insert here
 product
 QR code

2019/2015

in-lite®