

OUTDOOR LIGHTING

EVO FLEX 3



GENERAL

EVO FLEX 3
Article number:
EVO FLEX 3 _____ 10250310
DRIVER _____ 10250330
Category _____ Surface Light
Light source _____ LED
Warranty _____ 5 years

LIGHT SPECIFICATIONS

Color temperature _____ 3000 K
CRI (RA) _____ 86
Luminous intensity _____ 159.20 Cd
Light beam 0-180 _____ 124°
Light beam 90-270 _____ 124°
Net luminous flux _____ 534 lumen
Luminous efficiency _____ 37 lumenwatt

DIMENSIONS

Length _____ 3000 mm / 118.11"
Width _____ 6.5 mm / 0.26"
Height _____ 12 mm / 0.47"
Diameter _____ -
Total height _____ -
Recess depth _____ -

MATERIAL

Ring Plate _____ -
Lens _____ -
Exterior _____ PU
Easy Lock _____ included
Water resistant _____ yes

ELECTRONICS

Voltage _____ 12V AC
Output _____ 14.50 Watt
VA _____ 20.20
Power factor _____ 0.72
Light source _____ -
Lifetime _____ 25000 hours
Dimmable _____ no

AVAILABLE PRODUCT COLORS

-



AVAILABLE ACCESSORIES

EVO FLEX PROFILE, EVO FLEX CLIPS, EVO FLEX CORNER OUTSIDE, EVO FLEX CORNER INSIDE, EVO FLEX-EXT CORD 1, EVO FLEX PROFILE SINGLE, EVO FLEX SPIKE

PROTECTION RATING

IP : 68

Length of cable lead:
Complete length DRIVER incl. cable _____ 920 mm
From DRIVER to EASY-LOCK _____ 720 mm
From DRIVER to MINI CONNECTOR _____ 110 mm
From EVO FLEX to MINI CONNECTOR _____ 110 mm

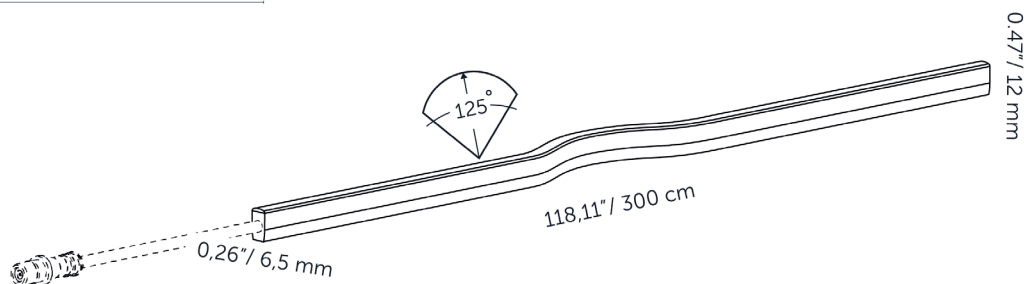

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
71	5.64	1.5
25	9.40	2.5
13	13.17	3.5
8	16.93	4.5
5	20.69	5.5
4	24.45	6.5
Beam angle (0-180°) (90-270°): 124° edge illuminance is 1/2 of Centre beam		

12 VOLT



in-lite®