

OUTDOOR LIGHTING

SWAY TABLE

GENERAL

SWAY TABLE

Article number 10202460

Category -

Light source LED

Warranty -

DIMENSIONS

Length -

Width -

Height 345 mm / 13.5"

Diameter 150 mm / 5.9"

Total height -

Recess depth -

ELECTRONICS

Voltage 5V DC, 1A

Output 1.8 Watt

VA 1.8

Power factor 1

Light source 24x SMD 0.06 W

Lifetime 25000 hours

Battery life Stand 1 = 14 uur

Stand 2 = 23 uur

Stand 3 = 38 uur

Stand 4 = 63 uur

Energy label G

Dimmable yes

Length of cable lead -



Charging 5.0V via micro-USB, min. current 1A (charger must be able to deliver at least 1A, otherwise longer charging time)

Security ESD protection
Overload protection
Overcharging protection
Overheating protection
Auto shutdown at 3.5V for better battery life

LIGHT SPECIFICATIONS

Color temperature 2900 K

CRI (RA) 96

Luminous intensity 40.7 Cd

Light beam 0-180 97°

Light beam 90-270 97°

Net luminous flux 110 lumen

Luminous efficiency 62 lumenwatt

MATERIAL

Color black

Lens polycarbonate



Exterior polycarbonate

AVAILABLE ACCESSORIES

-

PROTECTION RATING

IP : 55

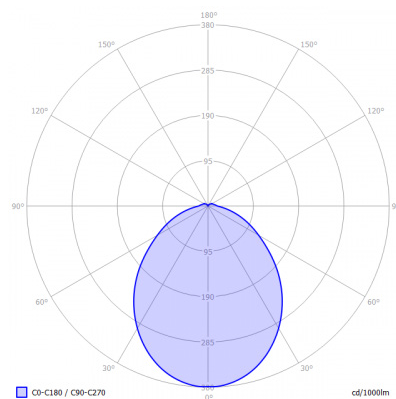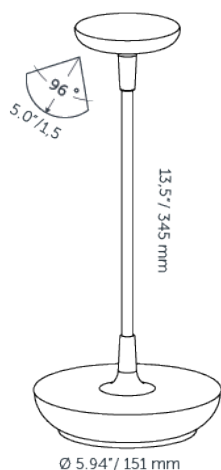

in-lite®

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
16	3.62	1.6
8	5.19	2.3
5	6.78	3.0
3	8.36	3.7
2	9.95	4.4
2	11.53	5.1
Beam angle (0-180°) (90-270°): 97° edge illuminance is 1/2 of Centre beam		

12 VOLT



in-lite®